



LINE · SUBSTATION CONNECTORS

≤ 400 KV


Mechanical support connector, two-cable 1113 ACSR/AS, 200 or 450 mm spacing, insulator-type base 3" and 5"

NMX-J-395-ANCE


Aluminum alloy

hot-dip galvanized steel

PRODUCT PHOTO



2D DRAWING · DIMENSIONS (MM)

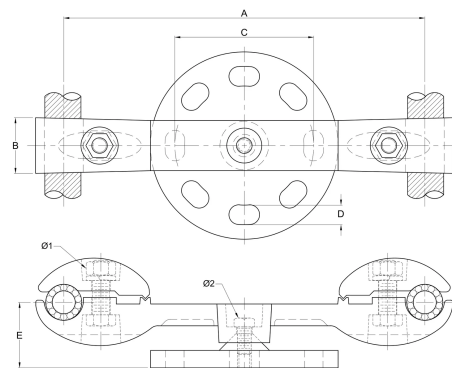

DESCRIPTION

Mechanical support connector, two-cable 1113 ACSR/AS, 200 or 450 mm spacing, insulator-type base 3" and 5" is a product from Partalum's **Substation Connectors** line, a Mexican manufacturer of high-voltage electrical connectors and fittings, compliant with the **NMX-J-395-ANCE** standard, made of aluminum alloy. It is available in **4 variants** (SEP-200-1113-3-EAT, SEP-450-1113-3-EAT, SEP-200-1113-5-EAT, SEP-450-1113-5-EAT).

VARIANTS · SELECTION TABLE BY CONDUCTOR

CATALOG	TAP RANGE	A	B	C	D	E	Ø1	Ø2
SEP-200-1113-3-EAT	795-1113	200	53	127	18	75	15.9	12.7
SEP-450-1113-3-EAT	795-1113	450	53	127	18	75	15.9	12.7
SEP-200-1113-5-EAT	795-1113	200	53	127	18	75	15.9	12.7
SEP-450-1113-5-EAT	795-1113	450	53	127	18	75	15.9	12.7