



LINE · SUBSTATION CONNECTORS

≤ 400 KV


Double mechanical support connector, cable 1113 ACSR/AS, insulator-type base 3" or 5", fixed and sliding

NMX-J-395-ANCE


Aluminum alloy

hot-dip galvanized steel

PRODUCT PHOTO

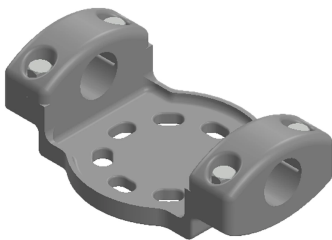

2D DRAWING · DIMENSIONS (MM)

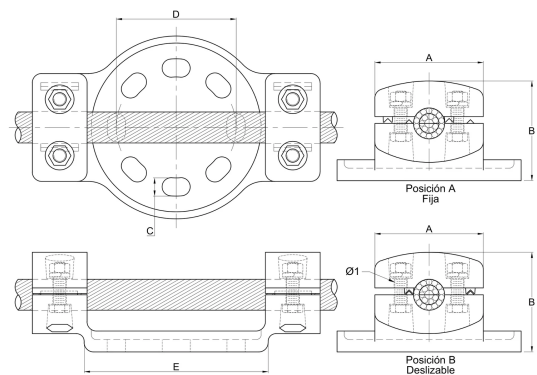

DESCRIPTION

Double mechanical support connector, cable 1113 ACSR/AS, insulator-type base 3" or 5", fixed and sliding is a product from Partalum's **Substation Connectors** line, a Mexican manufacturer of high-voltage electrical connectors and fittings, compliant with the **NMX-J-395-ANCE** standard, made of aluminum alloy. It is available in **4 variants** (SOPA-477-3-EAT, SOPA-477-5-EAT, SOPA-1113-3-EAT, SOPA-1113-5-EAT).

VARIANTS · SELECTION TABLE BY CONDUCTOR

CATALOG	A	B	C	D	E	Ø1	ALUMINUM CONDUCTOR SIZE	ACSR CONDUCTOR SIZE
SOPA-477-3-EAT	70	73	14	76	195	12.7	250-600	266.8-477
SOPA-477-5-EAT	70	73	17	127	250	12.7	250-600	266.8-477
SOPA-1113-3-EAT	75	100	14	76	195	12.7	600-1250	715-1113
SOPA-1113-5-EAT	75	100	17	127	250	12.7	600-1250	715-1113