



LINE · TRANSMISSION & SUBSTATION FITTINGS

80–480 KN

Compression Dead-End Clamp for ACSR/AS Conductor Cable

CFE 2C301-15

Extruded aluminum


Hot-dip galvanized steel

Utilizar herramienta de compresión de 10,000 PSI y cabezal hidraulico, dados de compresión tipo hexagonal. Tolerancia de compresión + 1.5mm

PRODUCT PHOTO



2D DRAWING · DIMENSIONS (MM)

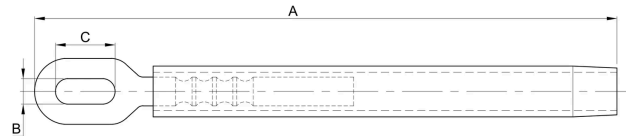

DESCRIPTION

Compression Dead-End Clamp for ACSR/AS Conductor Cable is a product from Partalum's **Transmission & Substation Fittings** line, a Mexican manufacturer of high-voltage electrical connectors and fittings, compliant with the **CFE 2C301-15** standard, made of extruded aluminum. It is available in **4 variants** (GRC-477, GRC-795, GRC-900, GRC-1113).

VARIANTS · SELECTION TABLE BY CONDUCTOR

CATALOG	ACSR CABLE	A	B	C	ALUMINUM COMPRESSION DIE	STEEL COMPRESSION DIE	FINAL HEX COMPRESSION DIM. — ALUMINUM	FINAL HEX COMPRESSION DIM. — STEEL
GRC-477	477 HAWK	500	26	60	36	19	32	15.5
GRC-795	795 DRAKE	590	26	60	50	21	43	17.6
GRC-900	900 CANARY	590	26	60	50	21	43	17.6
GRC-1113	1113 BLUEJAY	640	26	60	52	19	44	15.5