



LINE · TRANSMISSION & SUBSTATION FITTINGS

80–480 KN

Compression Splice for ACSS Conductor Cable

CFE 2C301-15

Extruded aluminum


Core, Hot-dip galvanized steel

Utilizar herramienta de compresión de 10,000 PSI y cabezal hidraulico, dados de compresión tipo hexagonal. Tolerancia de compresión + 1.5mm

PRODUCT PHOTO



2D DRAWING · DIMENSIONS (MM)

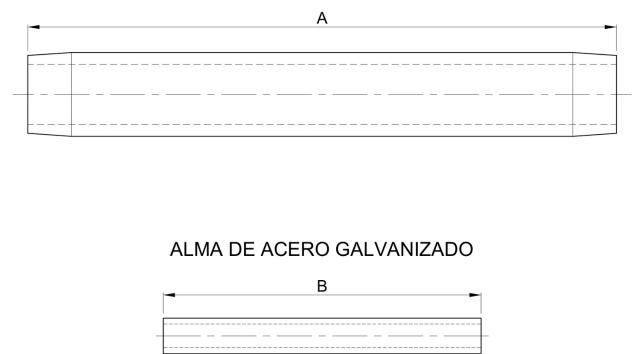

DESCRIPTION

Compression Splice for ACSS Conductor Cable is a product from Partalum's **Transmission & Substation Fittings** line, a Mexican manufacturer of high-voltage electrical connectors and fittings, compliant with the **CFE 2C301-15** standard, made of extruded aluminum. It is available in **5 variants** (PCT-336-AT, PCT-477-AT, PCT-795-AT, PCT-900-AT...).

VARIANTS · SELECTION TABLE BY CONDUCTOR

CATALOG	ACSS CABLE	A	B	ALUMINUM COMPRESSION DIE	STEEL COMPRESSION DIE	FINAL HEX COMPRESSION DIM. — ALUMINUM	FINAL HEX COMPRESSION DIM. — STEEL
PCT-336-AT	336 ACSS	629	140	VC8	19	VC8	15.5
PCT-477-AT	477 ACSS	703	160	36	19	32	15.5
PCT-795-AT	795 ACSS	912	180	50	21	43	17.6
PCT-900-AT	900 ACSS	912	180	50	21	43	17.6
PCT-1113-AT	1113 ACSS	1220	200	52	19	44	15.5