



LINE · TRANSMISSION & SUBSTATION FITTINGS

80–480 KN


Compression Repair Splice, 477-795-900-1113 ACSR

CFE 2C301-15


Extruded aluminum

Utilizar herramienta de compresión de 10,000 PSI y cabezal hidráulico, dados de compresión tipo hexagonal. Tolerancia de compresión + 1.5mm

PRODUCT PHOTO



2D DRAWING · DIMENSIONS (MM)

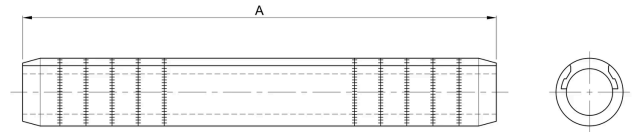

DESCRIPTION

Compression Repair Splice, 477-795-900-1113 ACSR is a product from Partalum's **Transmission & Substation Fittings** line, a Mexican manufacturer of high-voltage electrical connectors and fittings, compliant with the **CFE 2C301-15** standard, made of extruded aluminum. It is available in **4 variants** (PCTR-477, PCTR-795, PCTR-900, PCTR-1113).

VARIANTS · SELECTION TABLE BY CONDUCTOR

CATALOG	SLIP STRENGTH	A	CONDUCTOR DIAMETER	COMPRESSION DIE	FINAL COMPRESSION DIM.
PCTR-477	95% de la tensión de ruptura del conductor	285	21.79	36	32
PCTR-795	95% de la tensión de ruptura del conductor	330	28.14	50	43
PCTR-900	95% de la tensión de ruptura del conductor	330	29.51	50	43
PCTR-1113	95% de la tensión de ruptura del conductor	330	31.98	54	47